



Hybrid Fiber Optic Adapter

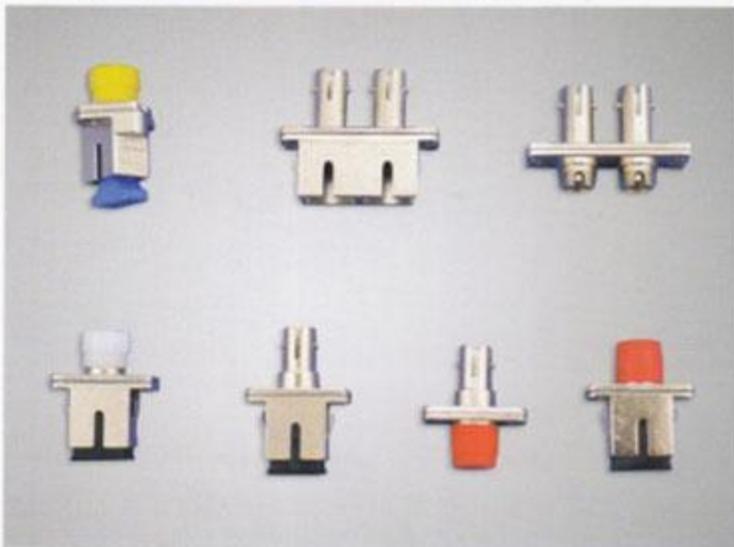


FC-SC,FC-ST,SC-ST ADAPTER

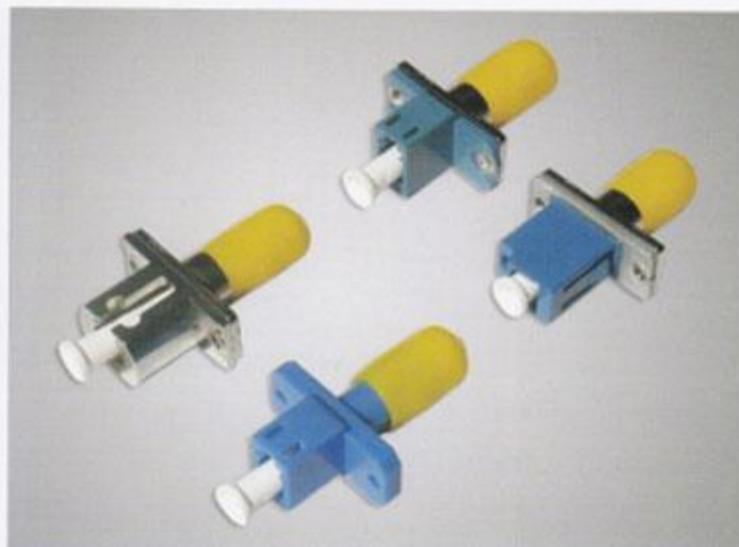


ST(F)-LC(F)ADAPTER



SC(F)-LC(F)ADAPTER

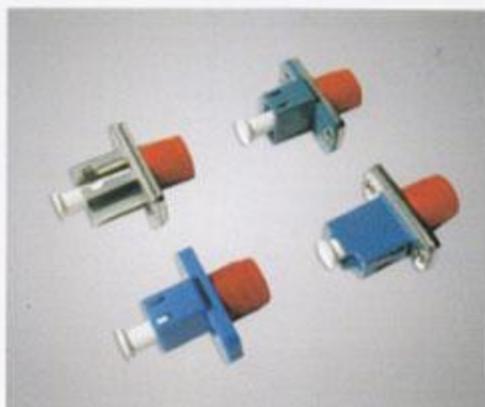

FC(F)-LC(F)ADAPTER

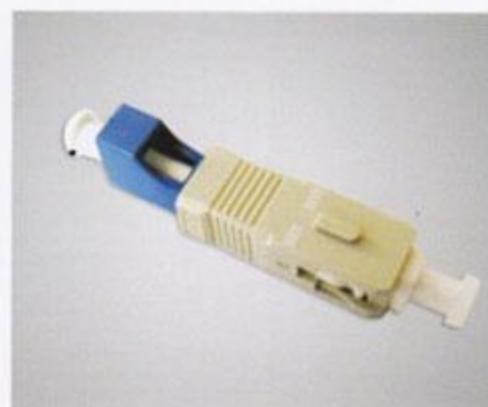

SC(M)-LC(F)ADAPTER

■ Applications

- CATV
- Telecom network
- Optical test equipment
- Local area networks
- Wide area networks
- Data processing Networks

■ Features

- Low insertion loss value
- Choice of housing and sleeve materials
- Stable capability and high reliability
- Excellent mechanical capability
- Variety of colors

■ Specifications

Item	Value
Insertion loss	$\leq 0.2\text{dB}$
Insert-pull test	1000 times
Repeatability	≤ 0.1
Tensile strength	$\geq 10\text{kg}$
Operating temperature	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Sleeve Materials	Zro2,Brass or Nickel