

Fiber Optic Clousre




FOSC-001



FOSC-002



FOSC-003

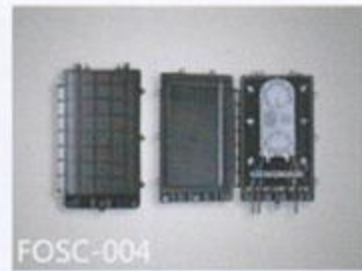

FOSC-004



FOSC-005



FOSC-006



FOSC-007



FOSC-008



FOSC-009



FOSC-010



Splice Tray-1(24Core)



Splice Tray-2(24Core)



Splice Tray-3(12Core)

Applications

- Optical network
- Local area networks
- Wide area networks

Features

- Suitable for aerial, duct, and underground application
- Valve option for pressure testing
- Quick open clamped design
- Reliable gasket sealing; reopened repeatedly without changing sealing material
- Suitable for ribbon and non-ribbon fibers

Specifications

Item	FOSC-001	FOSC-002	FOSC-003	FOSC-004	FOSC-005	FOSC-006	FOSC-007	FOSC-008	FOSC-009	FOSC-010
Size(HxWxD)mm	460x20 x110	415x200 x105	300x200 x93	386x250 x120	438x205	330x85	435x220	430x130	600x135	600x250
Cable diameter(mm)	Φ5~Φ10mm					Φ10~Φ60mm				
Cable port	4	8	2	6	4	3	3	5	5	5
Max capacity of splice	120	144	72	192	288	36	240	96	96	576
Weight(kg)	2.6	3.5	1.45	3.3	2.8	1	3.1	3.5	ab3.6	5.5
Materials	ABS,PC or PP									
Duration	25Years									
Type	Horizontal					Vertical(Dome)				